

WT235 Series

Low & High Frequency Wind Turbine Accelerometer, Top Exit Connector, 500 mV/g



CONNECTION TECHNOLOGY CENTER, INC.
VIBRATION ANALYSIS HARDWARE



Product Features


Designed for low speed Rotors, Wind Turbine Main Bearings, and Gear Box Inputs

- ▶ 500 mV/g Sensitivity ±10%
- ▶ 10,000 Hz for High Frequency Detection
- ▶ 5,000 VAC rms Protection

WT235-1D

2 Pin Connector


Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common

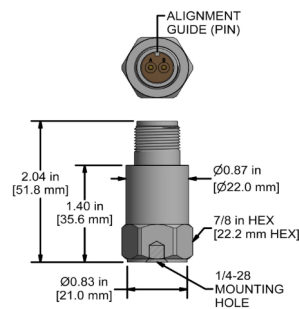

Stock Product

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	WT235-1D	M/WT235-1D	Environmental		
Sensitivity (±10%)	500 mV/g		Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	6-600,000 CPM	0.1 Hz-10 kHz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	36-180,000 CPM	0.6 Hz-3 kHz	Electromagnetic Sensitivity	CE Pending	
Dynamic Range	± 10g, peak		Sealing	Welded	
Electrical			Physical		
Settling Time	<2 Seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	3.25 oz	92 grams
Spectral Noise @ 10 Hz	1.7 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	0.2 µg/√Hz		Mounting	1/4-28	
Spectral Noise @ 1000 Hz	0.12 µg/√Hz		Connector	2 Pin MIL-C-5015	
Output Impedance	<100 ohm		Resonant Frequency	1,080,000 CPM	18 kHz
Bias Output Voltage	10-14 VDC		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Dielectric Breakdown Voltage	5 kVAC		Mounting Hardware	1/4-28 Stud	M6x1 Adapter Stud
			Calibration Certificate	CA10	

Typical Frequency Response

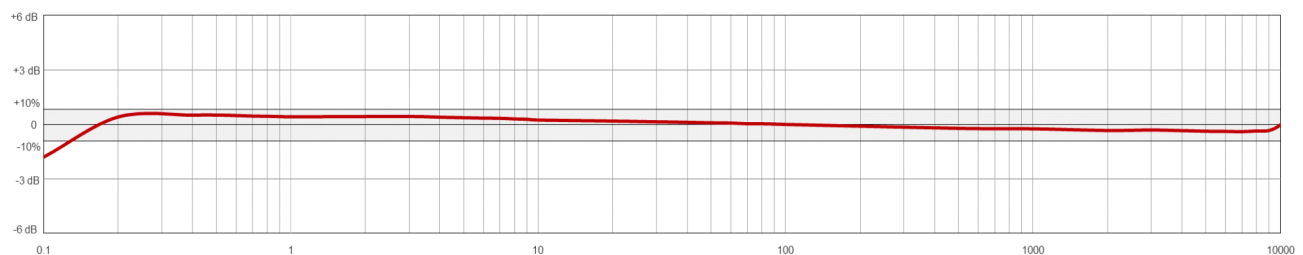

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900